COACH IN CLEARANCE OUTLINE (end view)

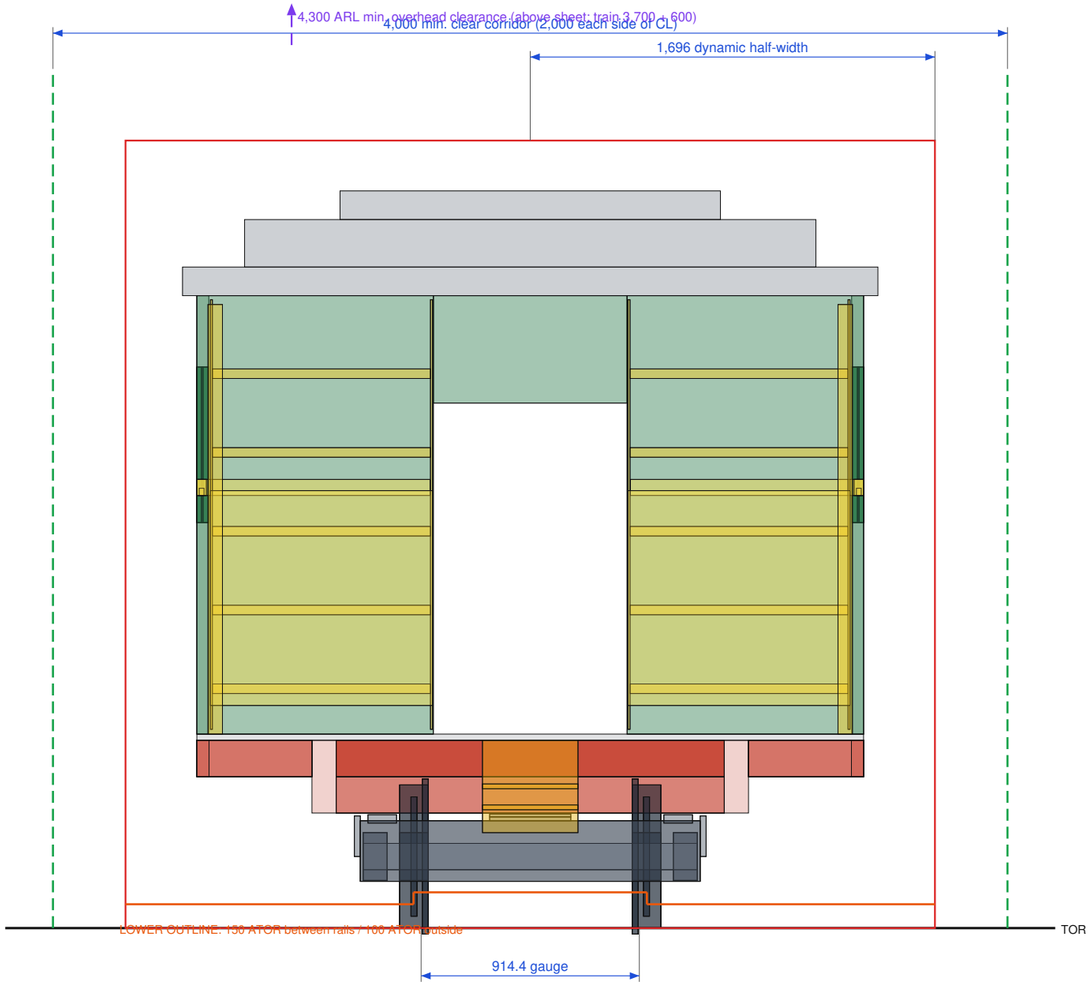

CLEARANCE BUILD-UP

Item	mm
Static half-width (coach + eave)	1,457
Coach end throw, R100	91
Coach centre throw, R100 (inside)	38
Loco end throw, R100	148
Body sway 2° at roof	90
Dynamic half-width	1,696
Adopted fixed-object clearance	2,000 from CL

TRACK NOTES

Rail: 60 lb bolted relay rail (RULED) - DO NOT ORDER until spec approved + PE
approves rail, joint bars, bolts and drilling (I-17, I-19).
Gauge 914.4 (36 in) +6/-3; widen 0 at R100.
Min. radius 100 m (Alan Keef, 23 Oct): stations on tangent track.
Design grade 2% GOVERNING (max 2.0% tangents; curves compensated so grade + curve resistance <= 2.0%).
Max wheel load basis 26 kN (L4: max driver wheel 25.89 kN).
Platforms OPTIONAL (R2): if built, 813 ARL, edge 1,472 from CL, tangent.
Egress strip: ground 2,000-3,300 from CL clear + walkable (+/-75)
on >= 1 side for coach stairs (reach 2,947); else sign 'do not deploy'.
Overhead: min. 4,300 ARL within 2,000 of CL (train 3,700 + 600).
Ties, fastenings, ballast section: AWAIT PE / supplier.
Loop sketch 5,180 ft vs 6,000 ft budget (survey pending).
LOWER OUTLINE: no part (wheels excepted) below 150 ATOR between the
rails or 100 ATOR outside; basis level track + vertical curves
R >= 500 m, new wheels, static. Min. found 196 mm (K2-lo).
FOULING POINT: clearance mark at 3.6 m track centres (2 x 1,696 + 200),
34.0 m from the points of each #8 (checked 33.99 m, K2-fp).
Working layout F (R80, level) - OWNER PENDING.

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Track, rail and clearance outline

Sheet K-401 · REV L2 · 2026-10-27 · NTS / 1:25 end

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED

REV 2026-11-02 cleanup: figures per data/mass_ledger.json and status.html (closed rulings). Not PE-reviewed.