SIDE

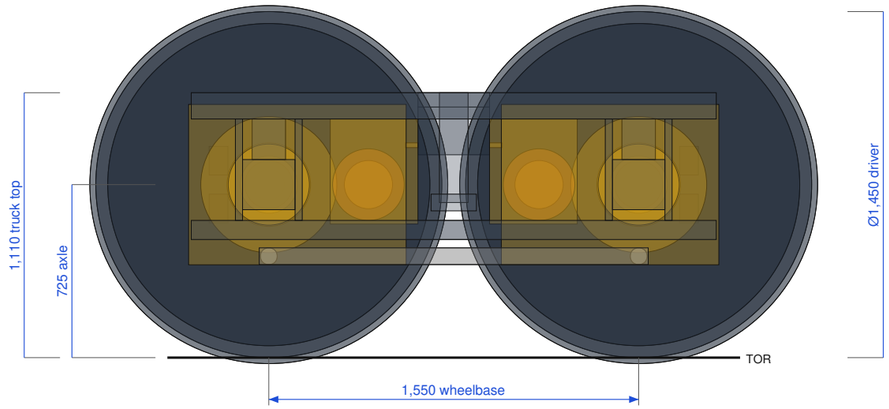

END (section at axle)

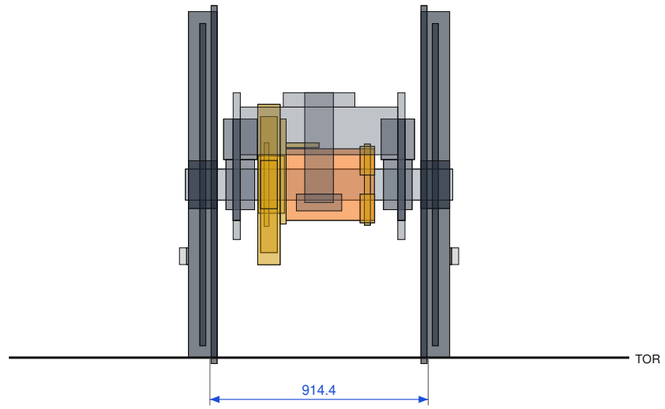

PLAN

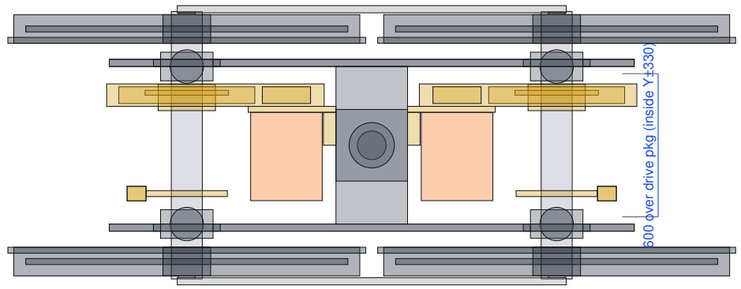

NOTES / FIXES

REV L1: plan LT18-LT20 truck - inside sideframes Y±330-360,
top Z1110; drivers Ø1,450 exposed outside; flange gap 50 in truck.
Transom PL16 box; pivot seat + Ø100 spherical pivot (LT20 GE100ES-2RS cand.).
REV L4 per axle (Y-): 45T 120-2 split rim ring bolted to a Ø150 pressed flanged hub
(no key, SHRINK 0.15-0.20), 54-link chain C417.6 to a 15T
on MS05 shaft code 5 W55x3x17; motor on PL25 slotted bracket under transom
(4x M20 10.9, 2 jack screws, 37 mm slide); oil-bath case Y-257..-163,
Z389-1061 (>=15 radial at 3% + travel), floating seal plate. Clear: case 3 / hub 5 to
spring reservation, motor 57 (23 at 3% stretch) to transom.
Disc Ø340x25 on axle Y+ + 2 spring calipers (B1-g), unchanged.
Removed: Dodge TA7315H15MS, H1B110, belt drop, TA rod.
AWAIT: Poclain AE (radial/offset, spline); chain/sprocket maker.
Inside axleboxes AWAIT bearing; primary springs AWAIT (LT35).
Anti-slip (L4.1): NO flow divider - PLUS+1 traction control, pony 3rd pickup (sand deleted).
L4.2: LOW TRACTION PIN Ø120 4140 + GE120ES housing under transom at Z650
(X4075/7275, calc L42-tp); centre plate flat-lined (vertical only). Bump stops ±22.
Sanders DELETED (11/2026); hill-hold kept; flange withdraw 28,
re-profile <= 27 (all wheels); P-103-1 hanger L-weld + 2 PL16 gussets (Loco Bot L-103).

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Powered truck + final drive / motor mounting (Ø1,450, MS05 + chain; detail L-103.2)

Sheet L-103 · REV L4.2 · 2026-10-28 · 1:25 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED

REV 2026-11-02 cleanup: figures per data/mass_ledger.json and status.html (closed rulings). Not PE-reviewed.