

SIDE ELEVATION

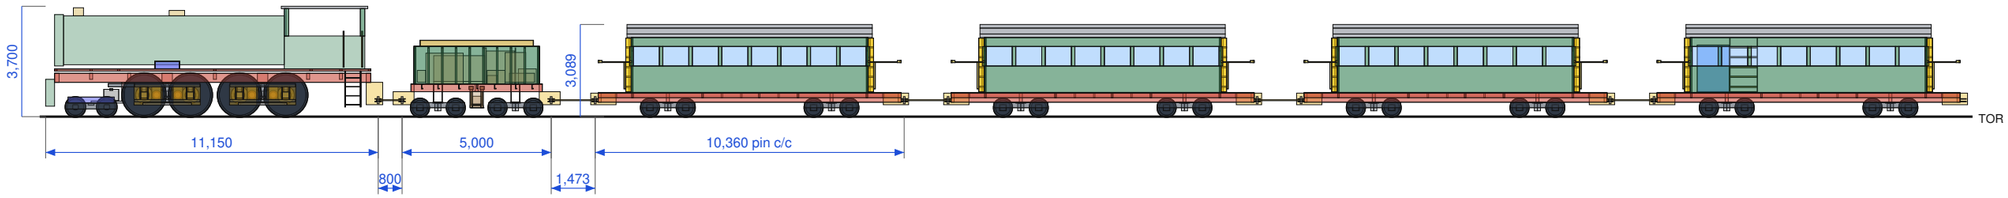

PLAN



CONSIST

Vehicle	Mass kg	Length	Width	Height ARL	Note
Locomotive	16,810	11,300	2,600	3,700	8 Ø1,450 drivers, 2 powered trucks + lead truck (LT18-20)
Tender	8,160 ledger / ≈8,300 rev T2	5,300	2,600	2,560	2× coach-type trucks; LT45.1 + TW-1 (T2)
Coach ×3 regular	13,200 loaded / 8,040 empty	10,160	2,794	3,089	32 seats
Coach ×1 accessible	11,000 loaded	10,160	2,794	3,089	11 seats + 2 wheelchair bays
Train	74,760 best est. / 77,500 design / 80,000 check	64,182			1.5 t ballast option incl. in design mass

KEY RULES

Coupling height 550 mm ARL, all vehicles.
Drawbars: DB-800 (loco-tender), DB-1473 (all others).
Two Grade 100 5/8 in safety chains + Crosby G-2130 1 in shackles at every joint.
Brake pipe + 8 bar feed pipe through every vehicle.
Min. radius 100 m (tangent at stations).
Clear 2,000 mm from track CL to fixed objects (K-401).
Overhead: nothing below 4,300 mm ARL within 2,000 of CL.
Egress strip 2,000-3,300 from CL walkable, >= 1 side.
NO RUNNING in gusts > 40 mph; tie down when parked (DECIDED).

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Train general arrangement

Sheet A-001 · REV L4 · 2026-10-28 · 1:200 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____