SECTION AT END PLATFORM (looking forward): +Y stair DEPLOYED, -Y stair STOWED

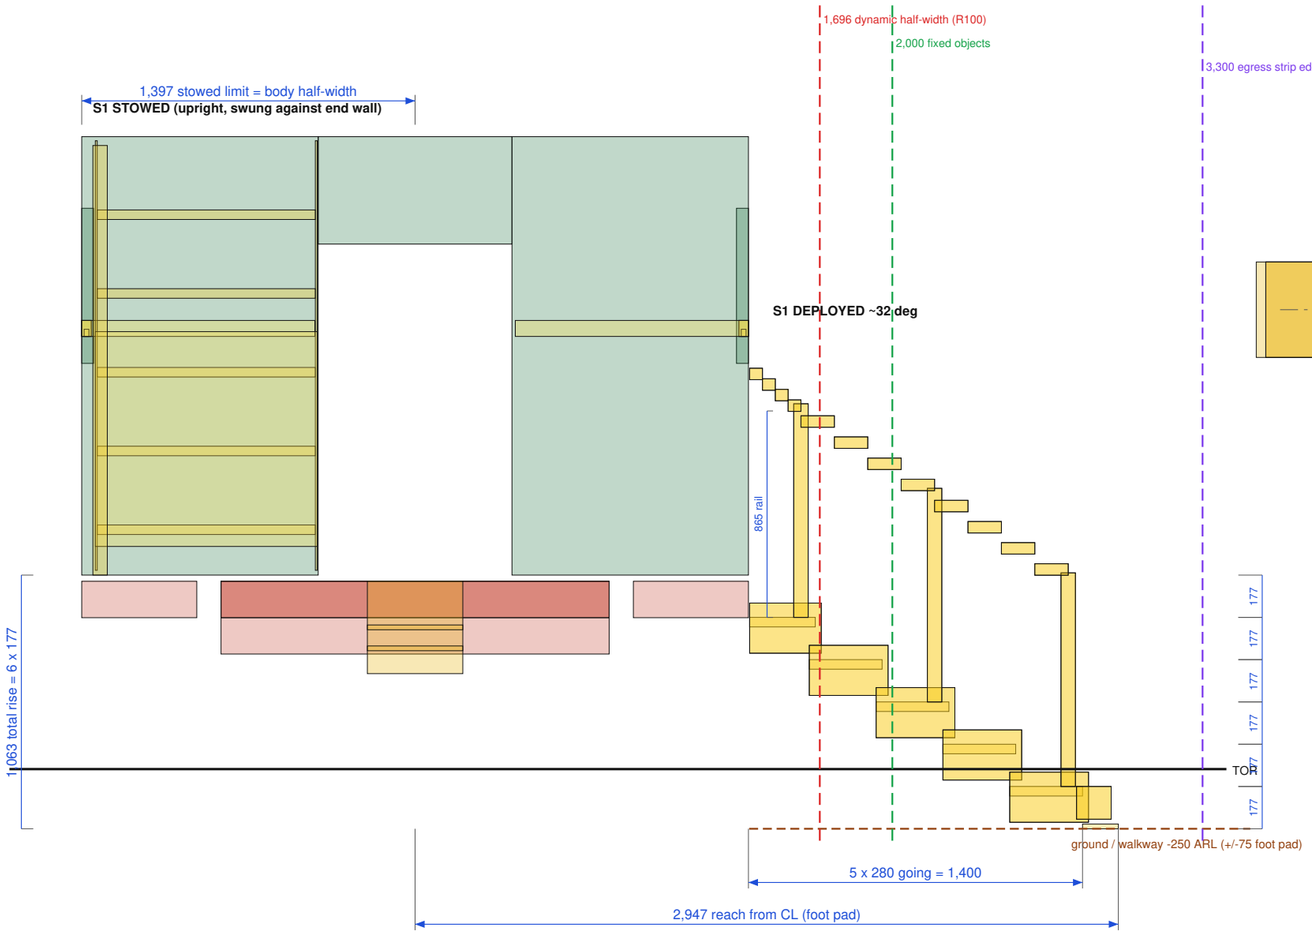

PLAN - FRONT END PLATFORM

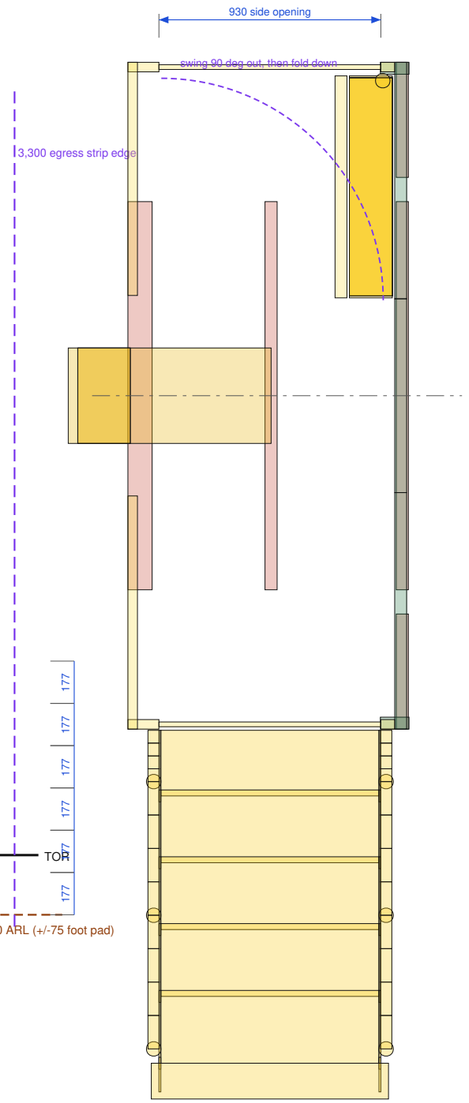

STAIR SCHEDULE

Item	Design (R2)
Count	18: S1 x16 (end platforms), S2 x2 (accessible side doors)
Risers	6 equal x 177 (7.0 in), floor 813 to ground -250 ARL
Treads	5 x 280 going (11 in), 3/16 in formed channel, abrasive nosing
Pitch / width	~32 deg / 914 (36 in) clear between stringers
Stringers	PL8 x 150 A36, hinge pins 2 x dia 25 4140 at floor edge
Handrails	both sides, 1-1/2 sch 40 at 865 on fold-flat 2 in sch 40 posts
Foot	adjustable pad +/-75; 2 x 3/8 G70 chain stays (foot unsupported)
Stowed	upright, inside 1,397 half-width: outline 1,696 UNCHANGED
Latch / interlock	gravity latch + safety pin + 'stowed' prox. switch in series
	loop: open = traction off + brake applied + cab lamp
Mass	~120 kg est.; gas-spring / damper assist AWAIT supplier
Finish	hot-dip galvanized, yellow nosings, 'EMERGENCY EXIT' decal

NOTES

Loads: treads/stringers 300 lb point + 100 psf; handrails 200 lb any direction (IBC 1607 - ASSUMED, PE to confirm basis incl. IBC 1011 / ASTM F770 / OSHA 1910.25). Calcs C15a-i all OK (max ratio 0.60, rail post).
S1: stowed upright against end wall beside 32 in end door (platform side opening stays clear for level boarding); crew/passenger pulls red release, swings stair into the opening, lowers it. S2: stowed beside 42 in door inside, slides across.
Egress: keep ground 2,000-3,300 from CL walkable on >= 1 side; wheelchair users - crew-assisted evacuation plan (County/PE).
Replaces the R1 fixed 2-tread side steps (265 / 275 risers, non-uniform, stopped 275 above rail).

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Coach emergency / boarding stairs (R2)

Sheet C-304 · REV L2 · 2026-10-27 · 1:25 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED