BALLAST POCKETS - SECTION AT FRONT BOLSTER

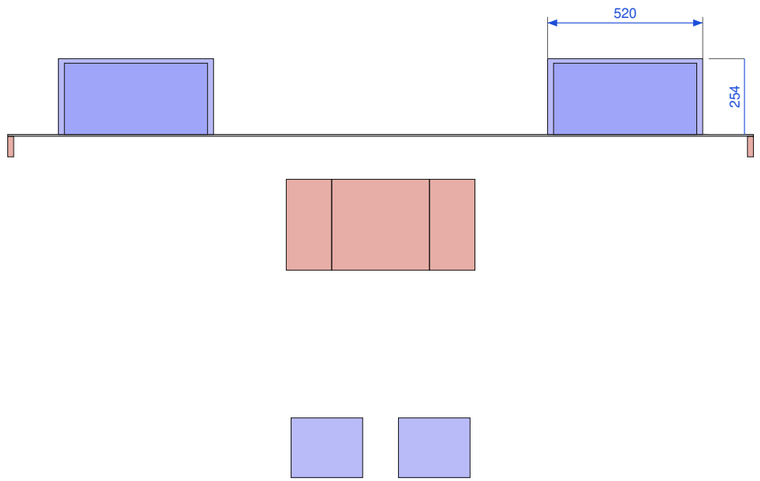

CAB STEPS + GRAB IRONS - SIDE

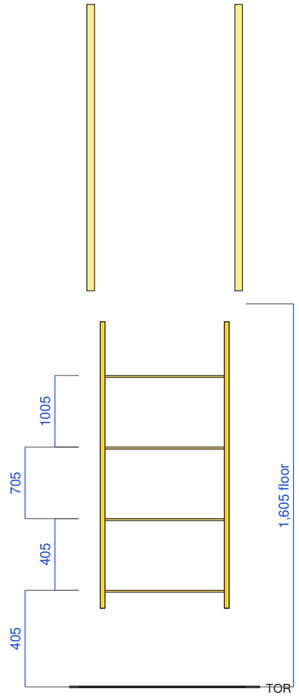

BALLAST (bolt-on)

Each side: pocket per Loco Bot L-106 (P-106-2: 60 walls), welded to deck/rail.
Fill (L4.1): 1 plate PL25.4 800x473 A36 (75.4 kg) per side.
Hold-down (P-106-1, L4.2): 4 × FB100x16x475 clamp bars 106-CB1 (23.9 kg)
inside the pocket on M16 set screws 4.8 N·m + jam nut 60 N·m; M20 rods 120 N·m.
BT-1 68.2 kg in Y- pocket. Check C9: end wall at 3 g (Loco Bot L-106).
NB-1 59.8 kg nose ballast PL25.4 at X450 (detail Loco Bot L-109).
Effect: K2-a 25.89 kN (fwd TE limit 33.0 kN) / 25.74 (rev 28.9) ≤ 26 kN.
Sanders: both trucks (L4.2) - see L-103 / B-601. Weigh-in hold point A-101.

CAB STEPS

Replaces stowed ladder (I-09): nothing moves, door stays clear.
4 treads PL8 serrated, 500 x 240, risers 300, inside 1,300 half-width.
Stringers FB 20x75, hung from PL12 brackets on main rail (2x 1/2-13 Gr 8).
Grab irons Ø32 (1-1/4 in) solid A36, 1,200 long, both sides of
each door, 75 mm clear to body; checks 83 MPa at 200 lb.
Tread: 65 MPa / 1.7 mm at 300 lb point (C10a/b).
Bottom tread 405 ARL (rev L1, floor 1,605): station step-stool or platform.

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Front ballast pockets (P-106), cab fixed steps and grab irons (was L-105)

Sheet L-106 · REV L4.2 · 2026-10-28 · 1:20 / 1:25 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED